



D & K Intertrade Pte Ltd

10 Jalan Besar, #11-03 Sim Lim Tower, Singapore 208787


Tel : 65 - 62941788

Fax : 65 - 62941275

Website: www.dnk.com.sg

Email: sales@dnk.com.sg

YURI 75Ω RF DISTRIBUTION COAXIAL CABLE

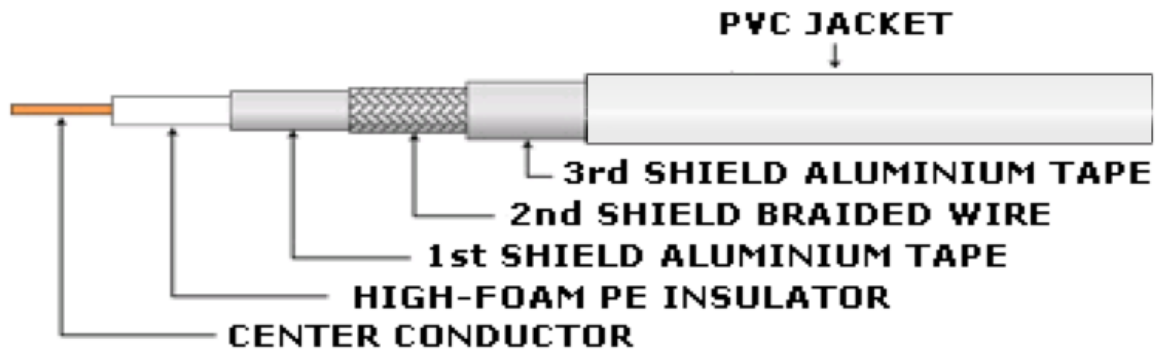

FEATURES:

TRI-SHIELD STRUCTURE	HIGH SCREENING FACTOR – ANTI INTERFERENCE
HIGH FOAM DIELECTRIC	LOW ATTENUATION, GOOD FOR HIGH FREQUENCY
LOW DENSITY PVC	HIGH HEAT RESISTANCE – GOOD FOR OUTDOOR USE
PVC w/UVA	HIGH UV RESISTANCE – GOOD FOR OUTDOOR USE
USAGE	RF DISTRIBUTION : CCTV, TERRESTRIAL TV, CATV, SAT TV
FREQUENCY	~ 3GHz
IMPEDANCE	75 Ω
EACH METER LENGTH MARKED ON THE CABLE	
COMPILED WITH STANDARD SIZE & SPEC	
MADE FOR OUTDOOR & INDDOR USE	

MODEL NUMBER:

RG-6/U-31SS60-U60LG	60°C, PVC : DENSITY/1.47, COLOR/LIGHT GREY
RG6-T1SS60-U75LG	75°C, PVC : DENSITY/1.40, COLOR/LIGHT GREY

Website: www.dnk.com.sg | Email: sales@dnk.com.sg